


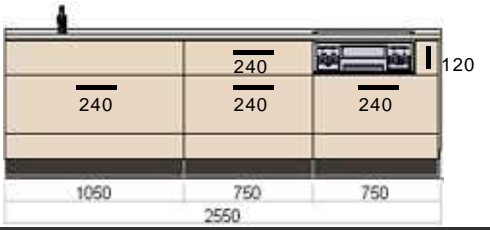
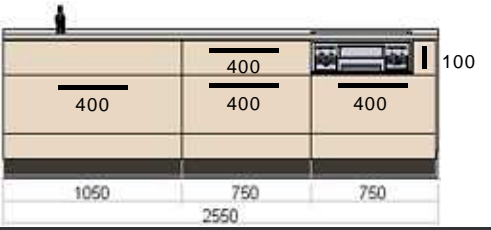
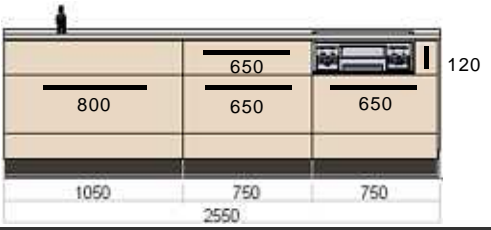
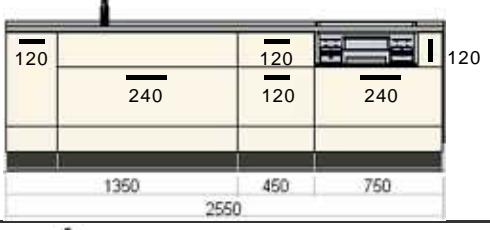
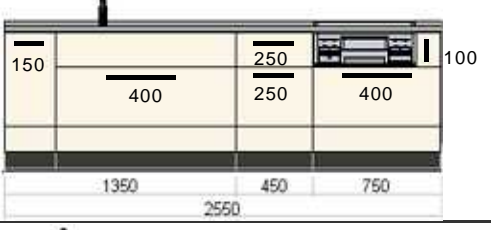
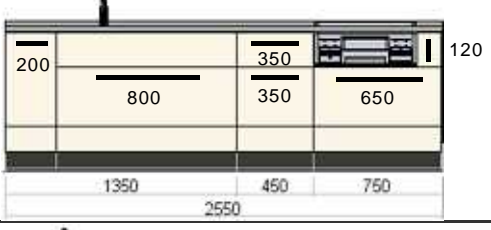
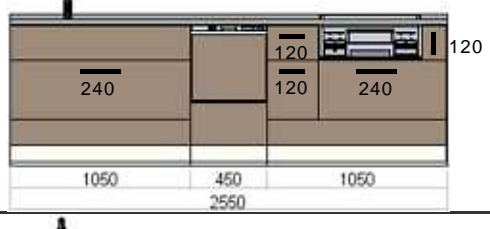
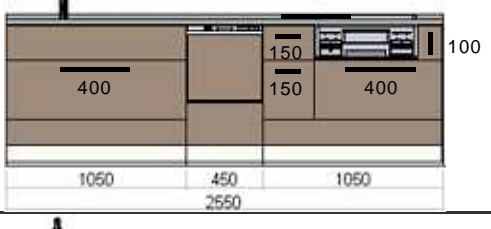
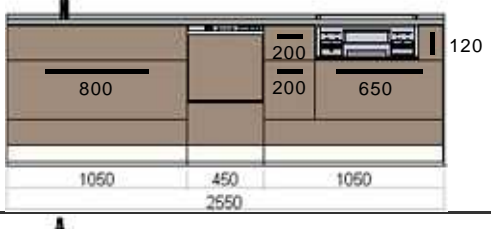
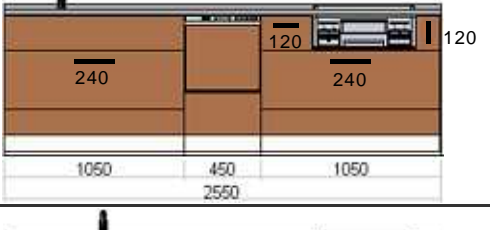
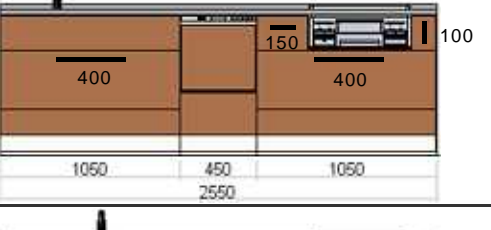
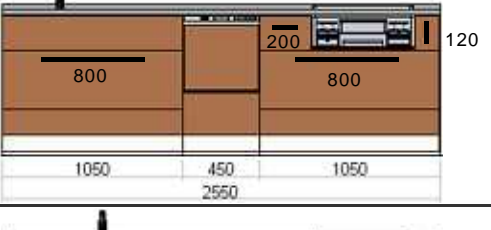
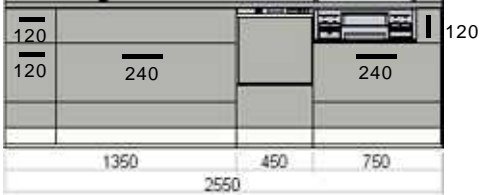
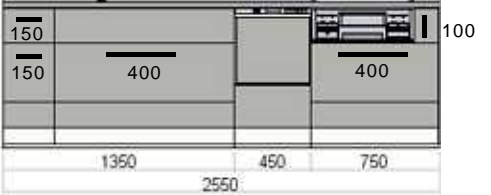
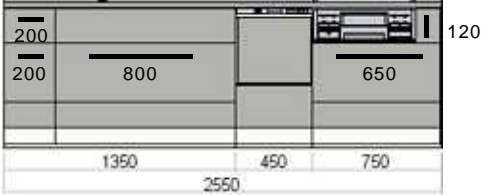


オフエア I型2550mm 引き手レイアウト・寸法図































	GS引手 	PC415C 	KT03引手 
食洗無タイプ シンクセンター-525mm	 240 240 240 120 1050 750 750 2550	 400 400 400 100 1050 750 750 2550	 800 650 650 120 1050 750 750 2550
食洗無タイプ シンクセンター-760mm	 120 240 120 240 120 1350 450 750 2550	 150 400 250 400 100 1350 450 750 2550	 200 800 350 650 120 1350 450 750 2550
シンク横食洗タイプ シンクセンター-525mm	 240 120 120 240 120 1050 450 1050 2550	 400 150 150 400 100 1050 450 1050 2550	 800 200 200 650 120 1050 450 1050 2550
シンク横食洗Nタイプ シンクセンター-525mm	 240 120 240 120 1050 450 1050 2550	 400 150 400 100 1050 450 1050 2550	 800 200 800 120 1050 450 1050 2550
シンク横食洗タイプ シンクセンター-760mm	 120 120 240 240 120 1350 450 750 2550	 150 150 400 400 100 1350 450 750 2550	 200 200 800 650 120 1350 450 750 2550

注1) 図示、引手長さはイメージです。寸法をよく御確認ください。

























注2) フラップ包丁刺しを選択された場合は、シンクキャビネット中段引出と同寸法の引手が付きます。

(※シンクセンター760mmにつきましてフラップ包丁刺しは選択できません)

オフエア カップボード 家電収納ユニット・カウンターユニット 引き手レイアウト・寸法図

	GS引手 	PC415C 	KT03引手 
家電収納ユニット 開き扉タイプ	 900 / 750 / 600	 900 / 750 / 600	 900 / 750 / 600
家電収納ユニット スライド/ワゴン タイプ	 900 / 750 / 600	  900 / 750 600	   900 750 600
カウンターユニット 開き戸タイプ <small>ハイカウンターも同様</small>	 900 / 750 / 600	  900 / 750 600	   900 750 600
カウンターユニット 3段スライドタイプ <small>ハイカウンターも同様</small>	 900 / 750 / 600	  900 / 750 600	   900 750 600
カウンターユニット ワゴンタイプ	 900 / 750 / 600	  900 / 750 600	   900 750 600

オフエア カップボード トールユニット 引き手レイアウト・寸法図

	GS引手 	PC415C 	KT03引手 
トールユニット上台 木扉タイプ	120  900 / 750 / 600	 900 / 750 / 600	 900 / 750 / 600
トールユニット上台 ガラス扉タイプ	 900 / 750 / 600	 900 / 750 / 600	 900 / 750 / 600
トールユニット上台 アルミ枠タイプ	 900 / 750 / 600 (手掛り引手仕様)	 900 / 750 / 600 (手掛り引手仕様)	 900 / 750 / 600 (手掛り引手仕様)
トールユニット下台 開き戸タイプ	 900 / 750 / 600	 900 / 750  600	 900  750  600
トールユニット下台 3段引出タイプ	 900 / 750 / 600	 900 / 750 	 900  750  600

注) レール引き手仕様の場合: トールユニット中段にはハンドル引き手が付きます。(アルミ枠タイプ以外)

- ・TK103BKの場合 : GS120 (ブラック)
- ・上記以外 : GS120 (シルバー)

Takara standard

「きれい」を暮らし、高品位をロー。

2018/7月作成

オフィリア引手ピッチ 法則

扉間口寸法	GS引手	PC415C	KT03引手
開き扉	120	150	120
ガス横小引出	120	100	120
300	120	150	200
450	120	250	350
600	240	250	500
750	240	400	650
900 ~	240	400	800

KT03引手は、引出の場合
「扉間口-100mm」が引手寸法と
なります(引手の最大寸法800mmまで)